



Is your child's car seat properly installed?

Use LATCH (Lower Anchors and Tethers for Children) to install the car seat. Check your car seat owner's manual and vehicle owner's manual for LATCH weight limits.

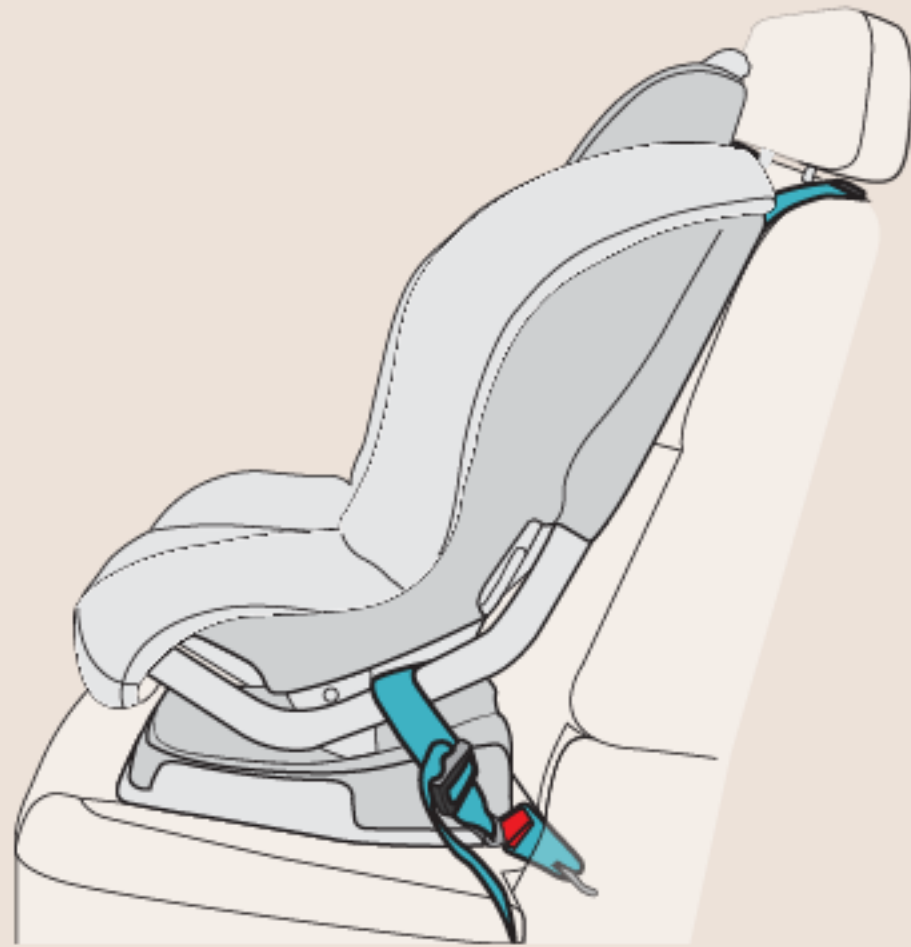


OR


Use the vehicle's seat belt by placing it through back and/or bottom of child safety seat as indicated on the seat/user's manual. Make sure seat belt is buckled and locked.

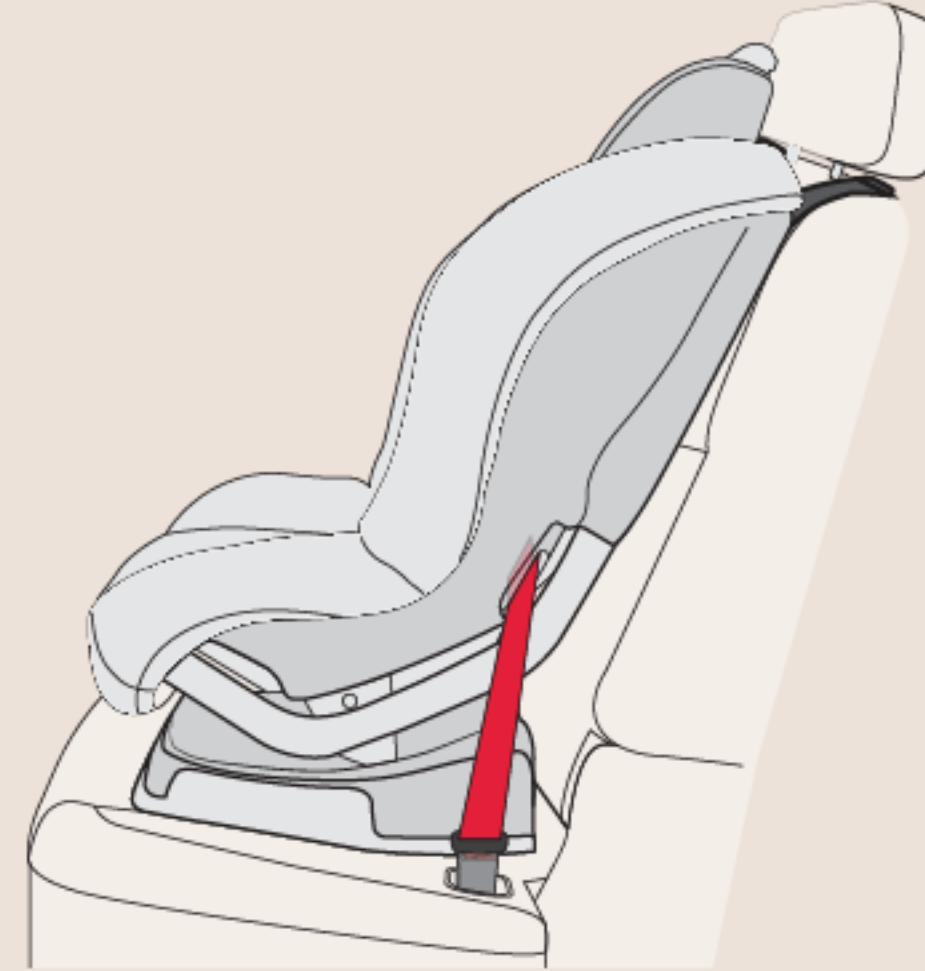

Regardless of whether you use LATCH or the vehicle's seat belt to install, ALWAYS ensure the top tether is tightly secured for forward facing seats.

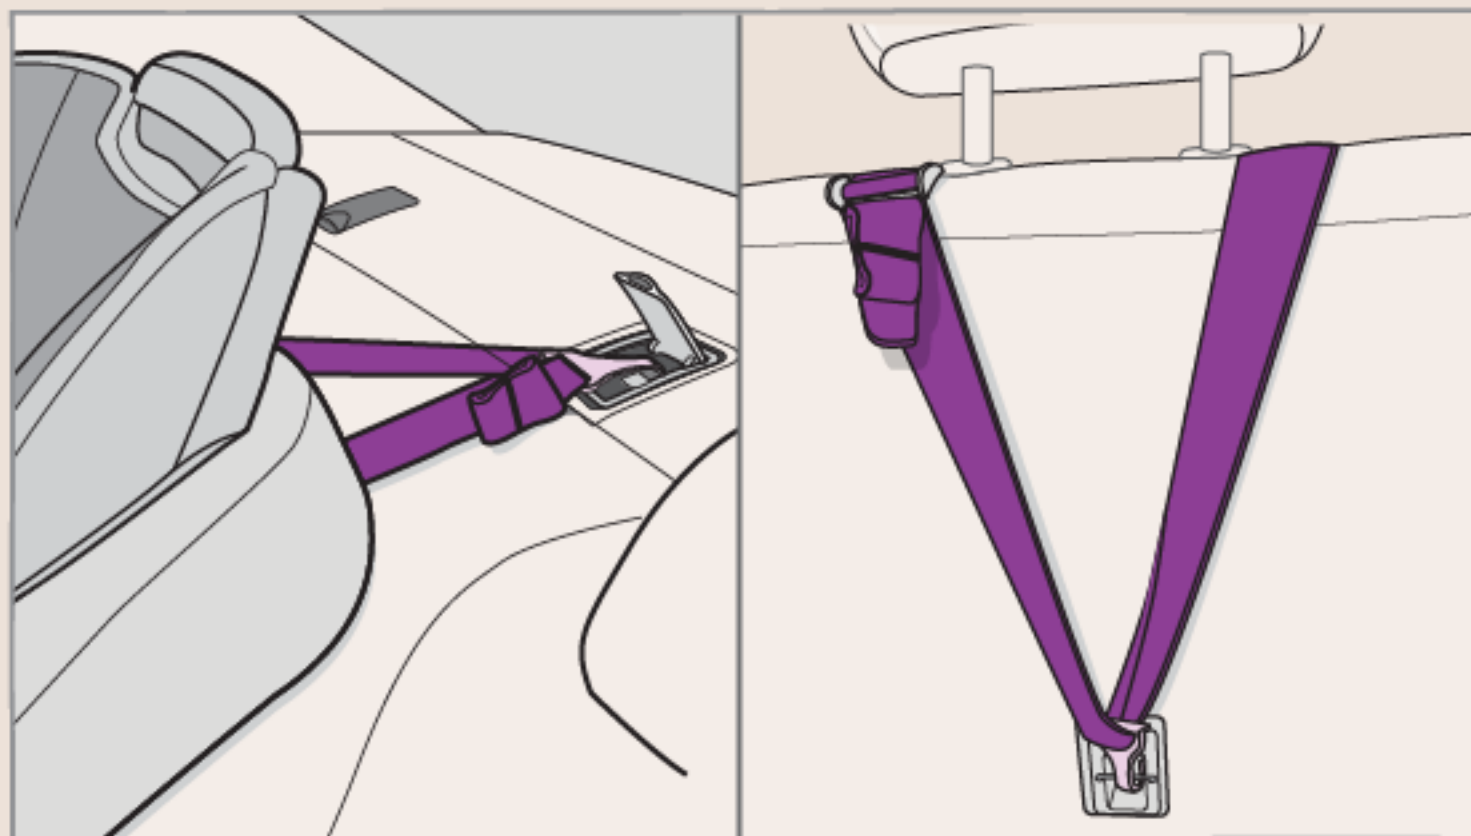

Many rear-facing car seats should not touch the front seat. Check to see if your car seat has the 1" rule.

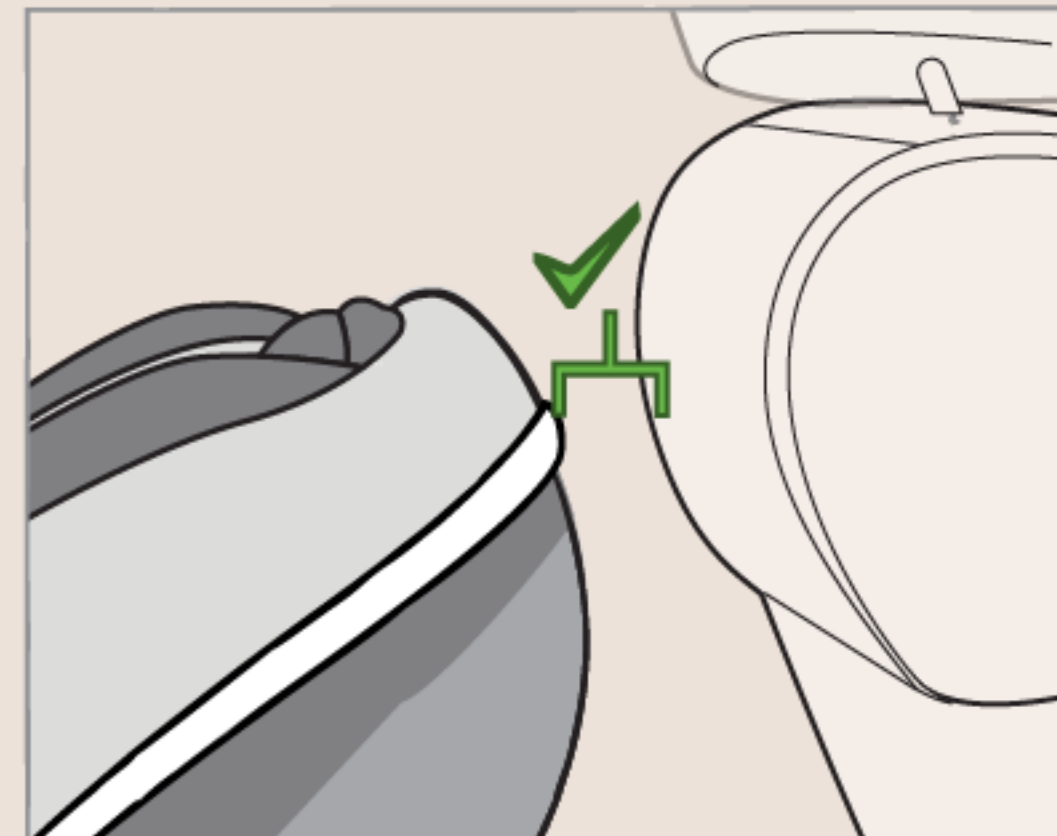

The car seat should not be able to move more than 1 inch from side-to-side or front-to-back.



Check the installation guides in the car seat owner's manual and vehicle owner's manual.



**Never place a rear-facing car seat in front of an active airbag.
Always properly buckle children aged 12 and under in the back seat!**

